




DC BRUSHLESS FAN

AF5D2510 25*25*10mm


Motor:DC Brushless
 Bearing:Ball、sleeve、Hydraulic
 Shell frame: PBT UL94V-0
 Fan blade: PBT UL94V-0
 Insulation:Class B
 Wire:AWG#26UL1007 (optional)
 PIN1:BLACK WIRE---(-)
 PIN2:RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

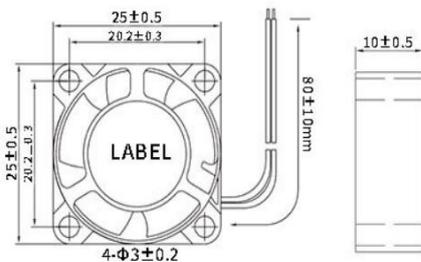

P@Q CURVE(AT RATED VOLTAGE)



Model	Bearing Mode①	Rated Voltage	Operating voltage	Rated current	Rated input power	Speed R. P. M	Maximum air Flow		Maximum Air pressure		Noise dB-A
		VDC	VDC	Amp	Watt		M3/min	CFM	mmH2O	InH2O	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M	M3/min	CFM	mmH2O	InH2O	dB-A
AF5D2510H05L	B=Ball S=Sleeve H=Hydraulic	5	1.8~3.6	0.14	0.72	8500	0.029	1.01	1.86	0.073	17.8
AF5D2510H05M		5	1.8~3.6	0.17	0.84	10500	0.041	1.44	3.24	0.128	27.2
AF5D2510H05H		5	1.8~3.6	0.19	0.96	12000	0.049	1.72	3.88	0.153	28.9
AF5D2510H05HH		5	1.8~3.6	0.22	1.08	13500	0.067	2.35	6.87	0.27	32.9
AF5D2510H05VH		5	1.8~3.6	0.26	1.30	15000	0.074	2.91	7.52	0.344	35.2
AF5D2510H12L		12	8.5~13.5	0.06	0.72	8500	0.029	1.01	1.86	0.073	17.8
AF5D2510H12M		12	8.5~13.5	0.07	0.84	10500	0.041	1.44	3.24	0.128	27.2
AF5D2510H12H		12	8.5~13.5	0.08	0.96	12000	0.049	1.72	3.88	0.153	28.9
AF5D2510H12HH		12	8.5~13.5	0.09	1.08	13500	0.067	2.35	6.87	0.27	32.9
AF5D2510H12VH		12	8.5~13.5	0.1	1.20	16000	0.074	2.63	8.73	0.344	37.6


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve (UL)Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold.etc.

导引： 编码规则Code Rule

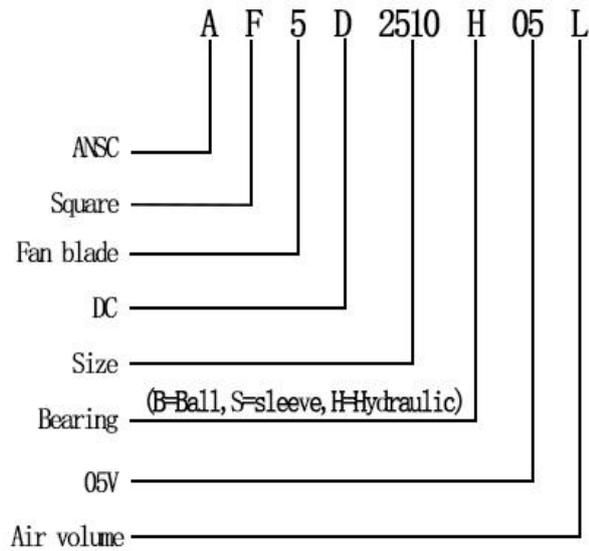

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>